


REMATRAC

Belt Tracking System providing solutions to avoid problems with the tracking and aligning of conveyor belts.

Conveyor belts that run off-center cause spillage, loss of production and damage to the belt as well as the conveying system. **REMA TIP TOP** offers a perfect solution: The REMA Belt Tracker. Another high-quality product from **REMA TIP TOP**. This specific tracking technology by **REMA TIP TOP** is available in virtually all belt widths and can be customized to meet customers' wishes. The belt tracking rollers are delivered with a hot vulcanized rubber running surface. The two-bearing construction guarantees optimal sealing.



REMATRAC Belt Tracking System

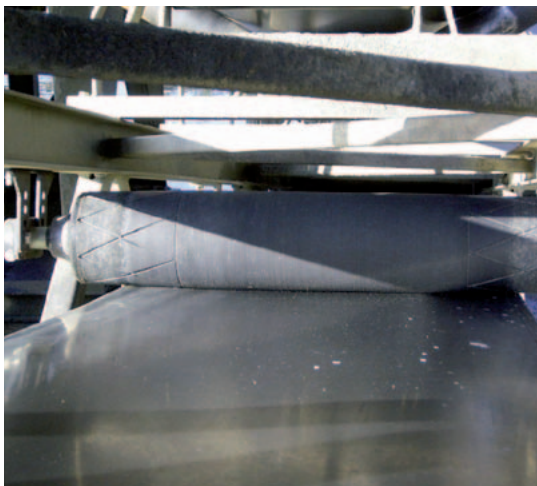

Advantages:

- Increased production capacity
- Maximum protection against damage to the belt as well as to the conveying system
- Reduced spillage and waste
- Reduced cleaning costs
- Reduced energy costs
- Compact design, easily installed
- Maintenance-free
- Operates under all conditions
- Suitable for reversible conveyors
- Long service life




Industrie

REMATRAC

Technical properties

Belt width	A	B	C (min. - max.)	D (Key)	E	Weight (kg)
450	686	490	85 - 200	14 x 70	850	33
500	736	540	85 - 200	14 x 70	900	35
600	838	640	85 - 200	14 x 70	1000	37
650	890	690	85 - 200	14 x 70	1050	39
750	990	790	85 - 200	14 x 70	1150	42
800	1040	840	85 - 200	14 x 70	1200	45
900	1140	940	85 - 200	14 x 70	1300	49
1000	1240	1040	85 - 200	14 x 70	1400	52
1050	1296	1090	85 - 200	14 x 70	1450	53
1200	1448	1240	85 - 200	14 x 70	1600	59
1350	1600	1390	85 - 200	14 x 70	1780	71
1400	1700	1440	85 - 200	14 x 70	1830	74
1500	1752	1540	85 - 200	14 x 70	1930	78

*Other types upon request.

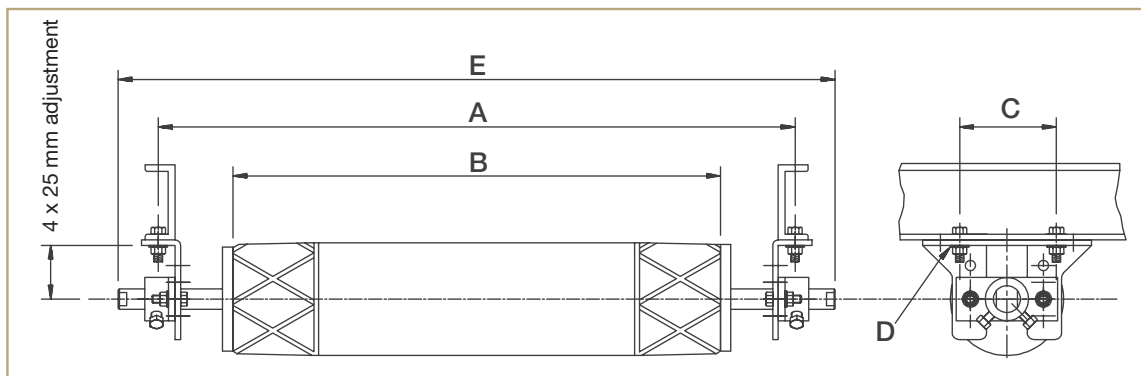

REMA TIP TOP GmbH
Business Segment Material Processing

Gruber Strasse 63
85586 Poing
Germany

Phone: +49 8121 70710-245
Fax: +49 8121 70710-222
www.rema-tiptop.com

Your local contact:

582 0531 - III.13 Printed in Germany

